

18X10W 4in1 led par can




Model: C025

Use Manual

Please read this manual carefully before use

www.fyilight.com

1. DIAGRAM :

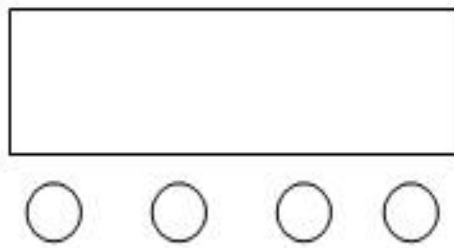

- A. ESC
- B. Down
- C. Up
- D. Enter

A

B

C

D

HOW TO OPERATE?

Press button A, there will be eight different effects.
 The first two numeric stands for functions (refer to Diagram II)
 The last two numeric stands for DMX address, or speed.
 You can modify it with B or C button..
 D button is to confirm while you settled

2.LED Display function cross-references.

(D button is to confirm while you settled)

No.	Display	Function
1	D001	DMX address
2	A001	So01: Music activate Au01-Au10: Auto
3	St00	Red
4	SP01-SP16	Green
5	R255	Blue
6	G255	White
7	F000-255	Hoop change
8	CC00-15	Gradual change
9	DE00-15	Pulse change
10	CP00-15	
11	Sound	Sound control

3. DMX512 Channels

Channels	Function	Details
CH.1	Dimmer	R、 G、 B、 Wdimmer, linear, dark →bright
CH.2	Red	R dimmer, linear, dark →bright
CH.3	Green	G dimmer, linear, dark →bright
CH.4	Blue	B dimmer, linear, dark--bright
CH.5	White	Wdimmer, linear, dark--bright
CH.6	Strobe	R、 G、 B、 W strobe, slow to fast
CH.7	Mac	0-18 R. 19-35 G. 36-53 B. 54-71 W. 72-255 color-auto
CH8	Speed adjustable	

4. Skill Parameters

- Voltage: AC110-240V/50-60Hz
- Consume:180W
- Lamp Type:4-in-1 LED
- Lamp Spec: High Power 10W 4in 1 (18PCS)
- Control mode: Auto run, sound activate, master /slave, DMX512.
- DMX Channel: 8CH
- Dimmer: Linear dimmer
- Strobe: 1-8flash/second

5. Feature:

Aluminum case, nice and wide application, less power consumption, high shining or flicker while dimmer.

Suitable for photograph, camera, and TV station as well.

18X10W 4in1 led par can



广州市丰艺舞台灯光设备有限公司

GUANGZHOU FYL STAGE LIGHTING EQUIPMENT CO.,LTD

地址:广州市白云区龙归镇南岭工业北路八号

ADD:No.8,North road nanling industrial zone,Longgui Town,Baiyun district,Guangzhou,China

E-mail:market@fyilight.com

电话/Tel:+86-020-36372571/+86-020-86423596